


### LBL030FCI-U-24V

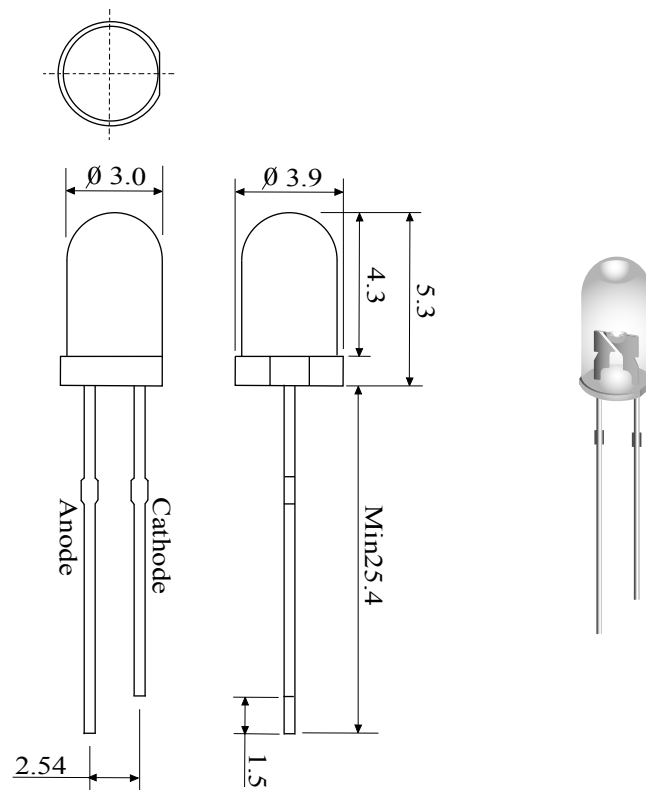

- \* 3mm with Ultra Bright Orange dice with 24v Resister.
- \* Encapsulated with Water Clear package.
- \* long leads.

#### Absolute Maximum Ratings:

| Parameter                   | Maximum Rating      | Unit |
|-----------------------------|---------------------|------|
| Peak Forward Current        | 120                 | mA   |
| Continuous Forward Current  | 30                  | mA   |
| Operating temperature Range | -20°C + 75°C        |      |
| Storage Temperature Range   | -40°C + 100°C       |      |
| Lead Soldering Temperature  | 260°C for 5 seconds |      |

#### Electre-Optical Characterature (Ta=25°C)

| Parameter Radiant  | Test Condition | Symbol          | Min. | Typ. | Max. | Unit |
|--------------------|----------------|-----------------|------|------|------|------|
| Forward Voltage    | If=10mA        | Vf              |      | 24   |      | V    |
| Reverse Current    | Vr=5V          | Ir              |      |      | 10   | uA   |
| Luminous Intensity | If=10mA        | Iv              |      | 2500 |      | mcd  |
| Spectral Bandwidth | If=10mA        | $\Delta\lambda$ |      | 30   |      | nm   |
| Wavelength         | If=10mA        | $\lambda_p$     |      | 605  |      | nm   |
|                    |                | $\lambda_d$     |      | 608  |      | nm   |
| Half View Angle    | If=10mA        | 2 $\theta$ 1/2  |      | 30   |      | deg  |